TEKNO RC — Setup Sheet — EB48 2.1

Open in So Dialed App

Setup: Low-Grip Setup (2.05)

Name: Kevin Tran — Raceline Designs | **Date:** November 22, 2026 | **Event:** Club

Track: Loganville RC Complex | **Size:** Open/Medium | **Traction:** Medium

Surface: Medium | **Type:** Outdoor hard-packed | Air temp: 29C/85F | Track temp: 27C/80F

More: sodialed.com/setups


Condition: Dry

Ackerman/Bumpsteer/Arm Plate/Spindle Height/Servo Saver












Front End:

Arms: Extra tough

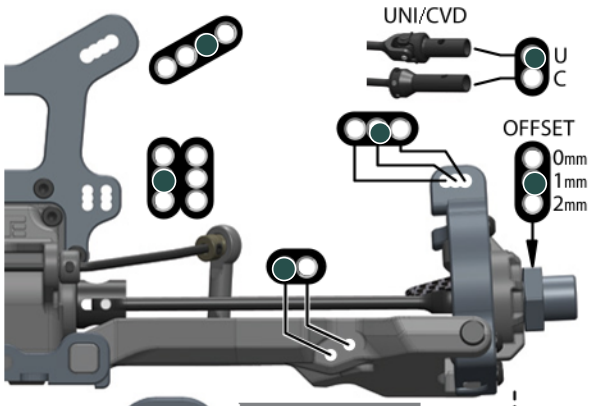




"A" Block:

TKR9161 (0mm)

TKR9161B (-1mm)



"B" Block:

TKR9162 (0mm)

TKR9162B (-1mm)


Suspension:

RIDE HEIGHT: 25 mm	CAMBER: -2
CASTER BLOCK: 18 deg	SWEEP: 0
KICK UP: 11	TOE: -2
SWAY BAR: 2.2mm	DROOP: 116 mm

Shocks:

OIL: 550 cst	BRAND: PT RC
PISTON: VRP Piston-8x1.3mm (1.6)	SPRING: 70mm 4.47lb Yellow
REBOUND: 0 %	BUILD: Emulsion


Rear End:

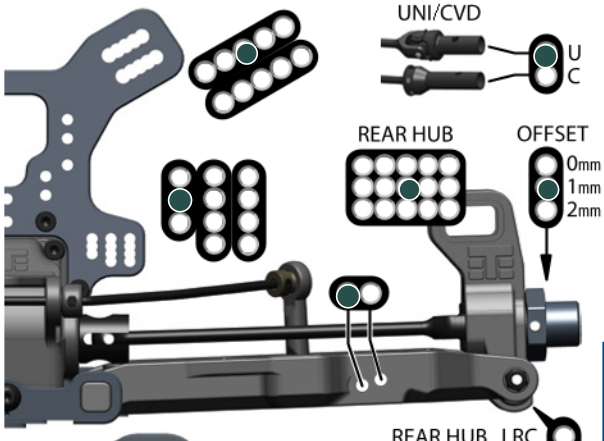



"C" Block: 0


Screw (TKR1324)



"D" Block: 0

Wheelbase:

F/R: 2/3 mm



(Shims)
(Thick - 2mm)
(Thin - 1mm)

Suspension:

RIDE HEIGHT: 27 mm	CAMBER: -2
ANTI-SQUAT: 1.5	TOE: 2.5
SWAY BAR: 2.4mm	DROOP: 127 mm

Shocks:

OIL: 468	BRAND:
PISTON: VRP Piston-8x1.3mm (1.6)	SPRING: 83mm 3.59lb Yellow
REBOUND: 0 %	BUILD: Emulsion

Chassis Braces:

REAR-SHORT:

Tires / Wheels:

Front: DIALED-RC V3	R: DIALED-RC V3
COMPOUND: SS	R: SS
INSERT: Closed cell	R: Closed cell
WHEEL: VP-Pro	R: VP-Pro
NOTES:	

Body / Wing:

BODY MAKE: Leadfinger

WING MAKE: Jconcepts Razor

WING MOUNT POSITION:

0mm: + 7mm: + 12mm:

NOTES: -M2C Chassis (2.0) -Tekno rear mudguard 11/20 - Tekno Ti rear skid plate 1/10 - Tekno Ti front skid plate

Differentials:

Brand: PT Racing

OPTION	FRONT	CENTER	REAR
Diff Oil	10,000	7,000	7,000
(TKR5144B)			
(TKR5144)			
(TKR5145B)			
(TKR9145)			
Standard (TKR9114-TKR9112)			
Lightened (TKR5114XB-TKR5112x)			
(TKR9150)			
(TKR9150B)			
(TKR9115)			
(TKR9115B)			
(TKR9149)			
(TKR9149A)			

Drivetrain:

PINION / SPUR: 16 / 44 (teeth)

Equipment:

ESC:	Hobbywing	XR8 SCT
BATTERY:	Gens Ace	6000 mAh
MOTOR:	Hobbywing	1900 Kv
SERVO:	ProTek	170SBL

Notes:

New FR arm - 9/25' New diff case - 10/25' Polished hinge pins: 5/18 +4mm shock standoff

NEW camber links: 11/25' Polished hinge pins: 10/5 *needs ? diff housing