FACTORY SETUP SHEET

Agama N1 1/8 NITRO BUGGY

DATE May 13, 2024

DRIVER

TRACK pdmcc

TRACK CONDITIONS | Type: Outdoor astroturf | Surface: Medium/Smooth | ○ Blue Groove

Moisture: Wet/Dry | Layout: Medium | Grip: Low/High | ○ Loose/Loamy


Air: 23C/73F | Setup: 22°C astro (pendle) | Open in So Dialed App

ENGINE O.s | **Gasket** mm | **Plug** | **Muffler** | **Fuel**


Clutch bell ● 13T ○ 14T | More: sodialed.com/setups | **Shoes** ● 3 ○ 4 | **Spring** 1 mm

DIFF	Front	Center	Rear
	Oil # 12.5	Xtr ronnefalk Oil # 12.5	Oil # 5,000
	43 / 13 T × T	Spur gear 47 T	43 / 13 T × T

FRONT SUSPENSION

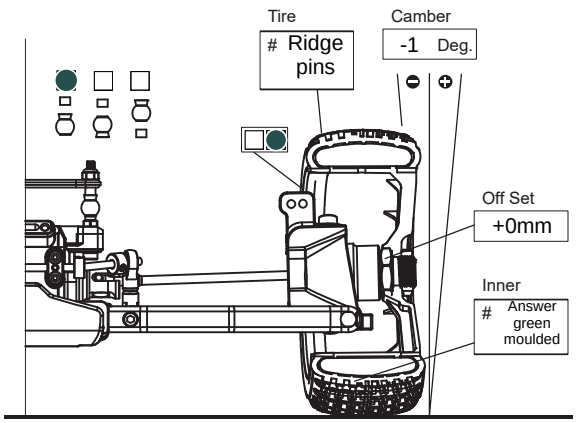

FRONT TOE ANGLE / CASTER ANGLE

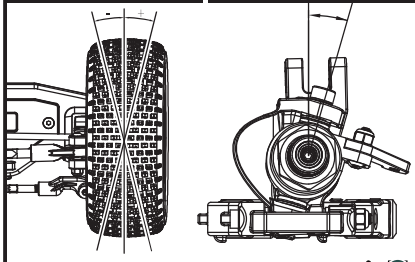

FRONT SHOCK

Oil # 55 wt


PISTON

- #0096-0615 6x1.5mm ☐
- #0096-0812 8x1.2mm ●
- #0096-06135 6x1.35mm ☐
- others ☐


CONE OF PISTON ● DOWN ☐ UP

SHOCK SPRINGS


- #5N52545 Grey - Red ☐
- #5N5545 Grey-Orange ●
- #5N57545 Grey -Yellow ☐
- others ☐

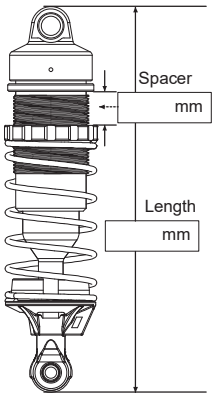

KICK UP



TOE ANGLE




ANTI – ROLL BAR (FRONT)


- 2.4mm ☐
- 2.6mm ☐
- 2.8mm ☐
- 3.0mm ●
- others ☐




ANTI SQUAT



TOE ANGLE



WHEEL BASE

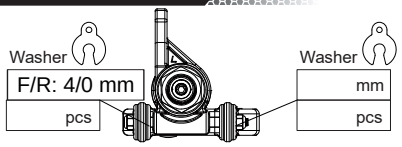

REAR SHOCK

Oil # 55 wt


PISTON

- #0096-0615 6x1.5mm ☐
- #0096-0812 8x1.2mm ●
- #0096-06135 6x1.35mm ☐
- others ☐


CONE OF PISTON ● DOWN ☐ UP


SHOCK SPRINGS

- #5N67566 Grey - Red ●
- #5N7066 Grey-Orange ☐
- #5N72566 Grey -Yellow ☐
- others ☐

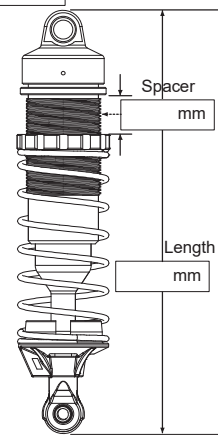


REAR SUSPENSION

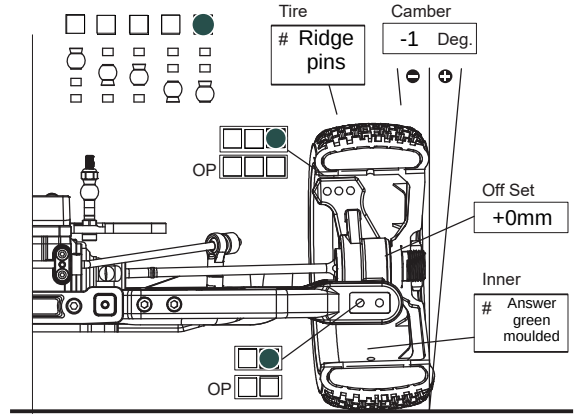




ANTI – ROLL BAR (REAR)

- 2.4mm ☐
- 2.6mm ●
- 2.8mm ☐
- 3.0mm ☐
- others ☐




DROOP LIMITER

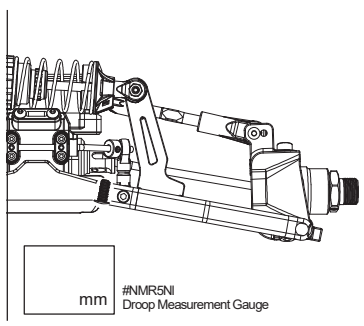

Front Half mm Rear Half mm


ACKERMAN

Rear wing: Kit hokws reamed



● Long ☐ Short

RIDE HEIGHT

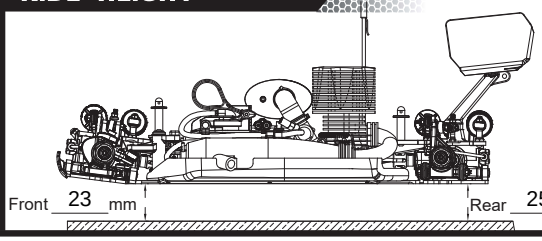

Front 23 mm Rear 25 mm