1/18 ASPHALT LATE MODEL SETUP SHEET

1RC RACING, LLC
WWW.1RC-RACING.COM

Setup: 2024 1RC Badger Tour - Race 3

Driver : George Mari **Date:** July 14, 2025

Track Name: 608 RC Raceway **City/State:** _____

Surface: Indoor carpet Grip: High/Medium

Race: Main A **Start:** _____ **Finish:** 2

Open in So Dialed App
More: sodialed.com/setups

Left Front

Tire Compound: Std Soft

Shock O-Ring: Black

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Hard

Spring Preload: 2

Caster: 2 degrees

Corner Weight: _____

Chassis Height: _____


Front

Toe: Standard toe-out

Shock caps: Drilled

Total Car Weight: _____

Kingpins: Screw

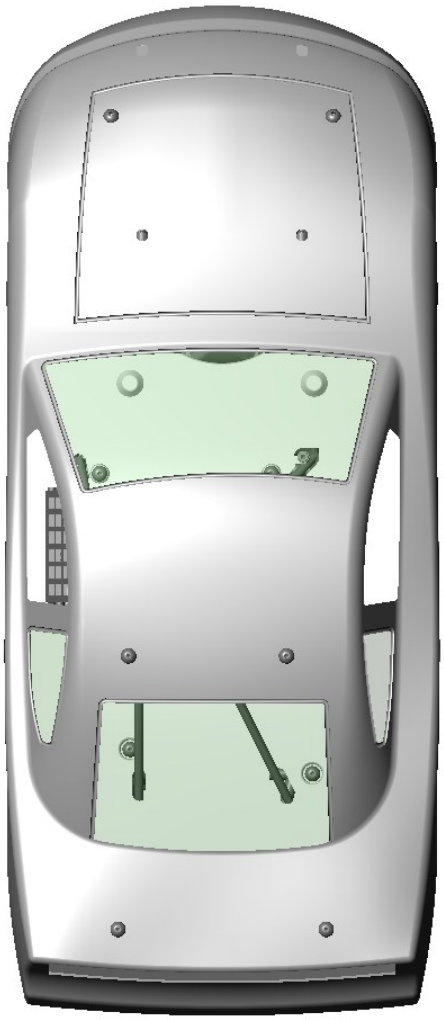

Right Front

Tire Compound: Std Soft

Shock O-Ring: Black

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Medium

Spring Preload: 3

Caster: 0 degrees

Corner Weight: _____

Chassis Height: _____

Electronics

Servo: _____ 1RC

ESC: _____ 1RC

Tx: _____

Rx: _____ Fly... Flysky GT5

Battery: 4 Cell 2 5 Cell LiPo

Motor: 8700kv 10,000kv

Notes: Steering exponential 0 pct

Misc

Servo Arm Hole: Upr Lwr

Dual Rate Amount: 70 %

Motor Heatsink: Yes No

Other: _____

Servo arm: Servo saver

Left Rear

Tire Compound: Std Soft

Shock O-Ring: Black

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Medium

Spring Preload: 2

Caster: _____

Corner Weight: _____

Chassis Height: _____

Wheel hex: 2 mm

Rear

Adjustable radius rod on LR, 2 turns shorter than stock, for some rear steer. Back out the ball stud for the LR shock at least 2 whole turns from the rear axle. This will keep the LR shock from binding.

Right Rear

Tire Compound: Std Soft

Shock O-Ring: Black

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Hard

Spring Preload: 2

Caster: _____

Corner Weight: _____

Chassis Height: _____

Wheel hex: 0 mm

Performance notes: A little too squirelly. Focus more on not drifting out on corner exit.