SET-UP SHEET

XB4'25 SET-UP SHEET VER.1 ©XRAY

XRAY XB4'25

RACE	
TRACK	
NAME	Joel D
DATE	January 29, 2025

LAPS		BEST LAP TIME	sec
QUALIFYING POSITION		FINAL POSITION	

TRACK

SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT
TRACTION	☐ ☐ ☐ ☐ ☒ ☐ ☐ ☐ ☐		
	VERY-LOW	MEDIUM	VERY-HIGH
SURFACE	☐ SMOOTH	☐ MEDIUM	☐ BUMPY
TYPE	☒ CLAY	☐ CARPET	☐ ASTRO
CONDITION	☐ BLUE GROOVE	☐ HARD PACKED	☐ DRY
	☐ DUSTY	☐ LOAMY	☐ WET


DIFFERENTIAL TYPE

FRONT ↓	MIDDLE ↓	REAR ↓
	SLIPPER ☐ ☐ SOLID	
GEAR ☒ DIFF	GEAR ☒ DIFF	GEAR ☒ DIFF
ACTIVE ☐ DIFF	ACTIVE ☐ DIFF	ACTIVE ☐ DIFF
60° 90° 120°	60° 90° 120°	60° 90° 120°
OIL 10,000 cSt	OIL 100,000 cSt	OIL 10,000 cSt

SATELLITE GEARS

COMP. ☐	COMP. ☒	COMP. ☐
STEEL ☒ ☐ O-RING	STEEL ☐ ☐ O-RING	STEEL ☒ ☐ O-RING
40T ☒ ☐ 41T	CROWN GEAR	40T ☒ ☐ 41T

CENTRAL SLIPPER & ONE-WAY SETTING

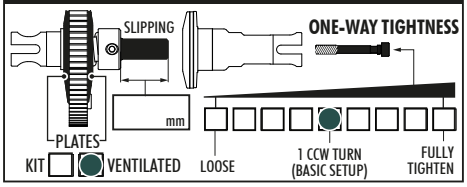

GEARING

PINION	T	81 T	SPUR GEAR

SHOCKS

FRONT		REAR
3 dot	SPRINGS	2 dot
350 cst cSt	OIL	300 cst cSt
2 HOLES ☐ ☐	ø1.6mm ☐ / ø1.8mm ☐	☐ ☐ 2 HOLES
Holes ☐	ø mm / ø mm	☐ Holes
KIT ☐ 2.0mm ☐ / Precision ☐ 2.5mm ☐	PISTON THICKNESS	☐ 2.0mm ☐ KIT / ☐ 2.5mm ☐ Precision
COMPOSITE ☐ / ALU ☐ 0mm ☐ -2mm ☐ -4mm ☐	COLLAR	☐ 0mm ☐ -2mm ☐ -4mm ☐ COMPOSITE / ☐ ALU
☐ +4mm ☐ +2mm ☒ 0mm	BALL JOINT	☒ 0mm ☐ +2mm ☐ +4mm

ANTI ROLL BAR

FRONT		REAR
1.2 mm	THICKNESS	1.3 mm

TIRES

FRONT		REAR
	BRAND	
	COMPOUND	
	INSERTS	
	WHEELS	

ELECTRONICS

MOTOR			SPEEDO
MOTOR TIMING			BATTERY

BODY	TOTOAL WEIGHT
Delta 4DL 0.5mm ☐ LIGHT	/g

COMMENTS

Dirt Base

Open in So Dialed App

More: sodialed.com/setups

FRONT — APPLIED ◉ ☒ APPLIED — REAR

