RC10 B7 TEAM KIT RC10 B7D TEAM KIT


Driver:		**Event:**		**Qualify:**		**Main:**	Main A
Date:	October 23, 2025	**Track:**	Larry's Performance R/C	**Finish:**	2	**Best Lap Time:**	14.8 s

Front Suspension:

Setup: Larry's new Carpet

Open in So D

Ride Height:	13 mm
Camber:	-1 deg
Toe:	0 deg
Anti-Roll Bar:	1.4mm
Arm Type:	Carbon
Tower Type:	JC -2
Wheel Hex:	Exotek Ti Fr Axle mm
Steering Block KPI:	B6.4 C-Hub & Knuckle
Caster Block Insert:	0 ☐ +2.5 ● +5 ☐
Bulkhead Type:	-2.5 JC Steel
Kick-Up Angle:	-2.5 ● 0 ☐ +2.5 ☐
Steering Stop Spacing:	0 mm
Caster Block Spacing:	Fwd ☐ Back ●




Ball Stud Spacing: 1

Ball Stud Spacing: 0

Bump Steer Spacing: 0

Steering Plate: +1mm



Axle Height:

+3	●
+2	☐
+1	☐
+0	☐


Steering Bellcrank Position: Up ☐ Down ●

More: sodialed.com/setups

Ball Stud Spacing: 1

Ball Stud Spacing: 1

Ball Stud Spacing: N/A

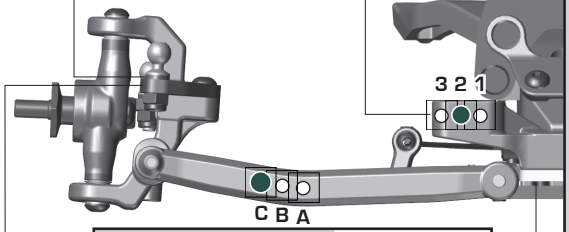

Caster Block Link Mount: Inside hole B6.4 Hub


Front Bulkhead Spacing: 1

Rear Suspension:


Ride Height:	13 mm
Camber:	-1 deg
Anti-Roll Bar:	1.4 mm
Arm Type:	Carbon
Tower Type:	JC -2
Arm Spacing:	Fwd ● Mid ☐ Back ☐
Wheel Hex:	6 mm
Hub Type:	Standard HRC
Hub Spacing:	Fwd ● Mid ☐ Back ☐
Drive Shaft:	CVA's ☐ Universals ●

Notes: Universals instead of CVAs

C Mount: Standard




D Mount: Standard



Axle Height:

●	▼0 3▲	+3
☐	▼1 2▲	+2
☐	▲1 2▼	+1
☐	▲0 3▼	+0

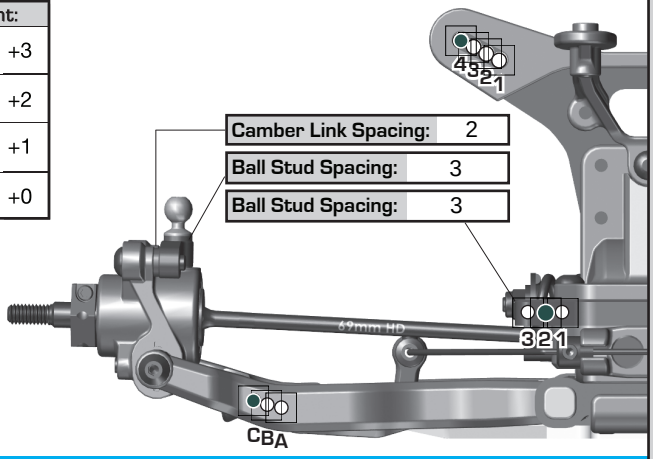

Camber Link Spacing: 2

Ball Stud Spacing: 3

Ball Stud Spacing: 3

Electronics:

Radio:	Futaba	**Servo:**	ProTek
EPA:	Throttle: 100 %	Brake:	100 %
ESC:	Hobbywing		
ESC Settings:			
Motor / Wind:	Exalt 17.5 T	**Timing:**	50
Pinion:	34	**Spur:**	72

Battery Mount: Std ● Offset ☐

Back 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ● Forward

Battery:	R1 Wurks	**Weight:**	

Notes: GForce Power Cap TWO fans on Motor

Drivetrain:

Differential: Ball Diff: ☐

Height: 3 mm Gear Diff: ●

Diff Setting: 80,000 cst

Notes: 3 Gear Trans

Slipper Clutch:

Type:	Direct drive
# of Pads:	Exotek Slipper Eliminator
Setting:	

Shocks:

	Front	Rear
Piston:	2.5mm 2x1.7mm holes	2.5mm 2x2.0mm holes
Thickness:		Core RC Low Mount
Fluid:	40 wt	32.5 wt
Spring:	TLR Purple	Schumacher Core RC Black
Limiters:	Int: 0 Ext: 0	Int: 0 Ext: 5
Stroke:	22 mm	27.5 mm
Eyelet:	0 mm	+2 mm
Cup Offset:	0 ☐ +5 ● +9 ☐	0 ☐ +5 ☐ +9 ☐



Kashima Bodies: ● **Chrome Shafts:** ● **Machined Spacers:** ☐

Notes: Rear upper mount spaced forward 4mm to make shock perpendicular to arm

Track Info:

Size:	Tight
Surface:	Indoor carpet
Traction:	High
Moisture:	Dry
Condition:	Smooth
Temperature:	21C/70F
Notes:	

Tires:

Front Tires:	Proline Harpoons
Front Compound:	CR4
Front Insert:	None
Rear Tires:	Proline Harpoons
Rear Compound:	CR4
Rear Insert:	Stock OC Trimmed to Wheel Width
Wheel (F/R):	JC Mono Narrow JC Mono
Notes:	Glued Sidewall on Fronts

Body, Weight:

Body:	Proline Axis
Front Wing:	Upper Front Wing
Rear Wing:	B7 Lightweight
Wing Angle:	0° ☐ 3° ● 6° ☐
Chassis Length:	B7 -4mm
Servo Weights:	Custom Brass
Electronic Weights:	Custom Brass
Total Vehicle Weight:	1496 g

Vehicle Comments:

:: For more setups, visit https://www.associatedelectrics.com/teamassociated/manuals_and_setup_sheets/