RMX 2.0S

1/10 SCALE RC RWD HIGH PERFORMANCE DRIFT CAR

UPDATED SETUP SHEET

Open in So Dialed App


Name: Devon

Setup: Twisted Lanes Setup (Low grip) 7/15/26

DATE : July 21, 2026 SURFACE : Indoor concrete NOTE :


TRACK : Twisted Lanes GRIP : Low

Caster

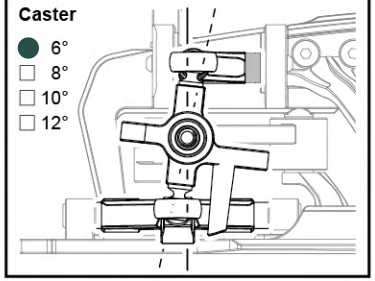


- [x] 6°
- [ ] 8°
- [ ] 10°
- [ ] 12°

Front wheel hubs




Centered

More: sodialed.com/setups

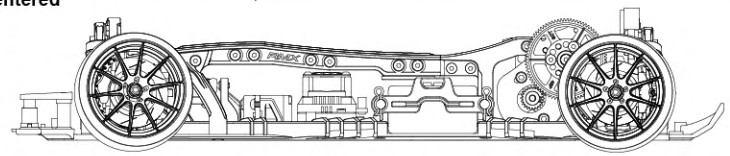


- [ ] Centered low gravity

Motor position: RMX HCG

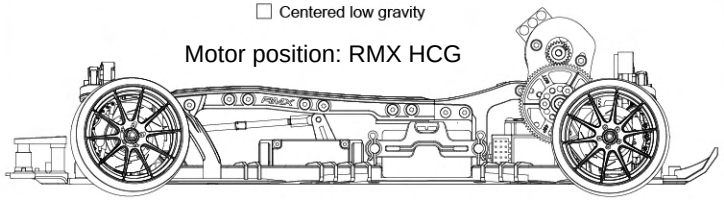

- [ ] Centered upper motor

Rear wheel hubs



FRONT

Tire: Yokomo

Wheel: MST TE37 high traction, 5mm offset

Offset: 5 mm




REAR

Tire: Yokomo

Wheel: MST TE37 high traction, 5mm offset


Offset: 5 mm

Front damper stay

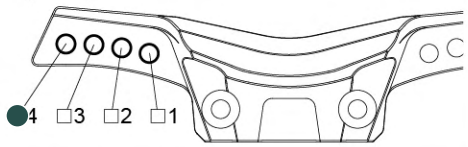

- [x] 4
- [ ] 3
- [ ] 2
- [ ] 1


Rear damper stay

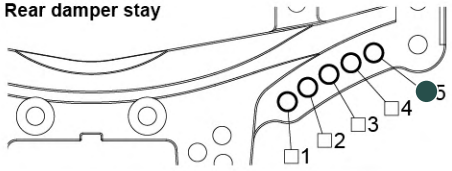


- [ ] 1
- [ ] 2
- [ ] 3
- [ ] 4
- [x] 5

Rear diff

MST gear diff 3000 cst oil



- [ ] Spool
- [ ] Ball diff.




- [ ] Alum spool
- [ ] Alum ball diff.

Transmission type: Straight gears

2nd Reduction Gear

- [ ] 32T / 18T - 1.78
- [ ] 34T / 18T - 1.89
- [ ] 36T / 17T - 2.12
- [ ] 40T / 16T - 2.50
- [ ] 40T / 13T - 3.08
- [ ] 42T / 11T - 3.82

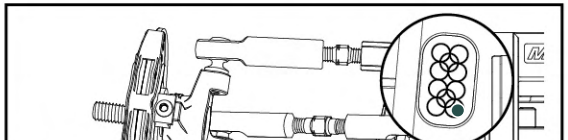


Camber: -5


Toe-in: -2


Ride height: 8 mm GROUND

Front upright



Rear upright



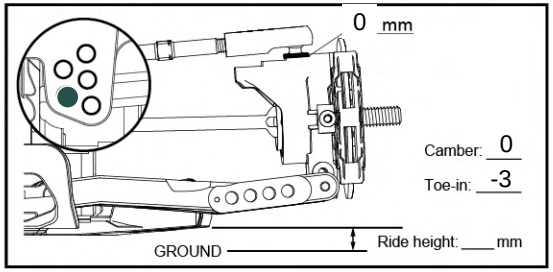


Camber: 0

Toe-in: -3


GROUND Ride height: ___ mm

Front

Suspension mount Rollcenter

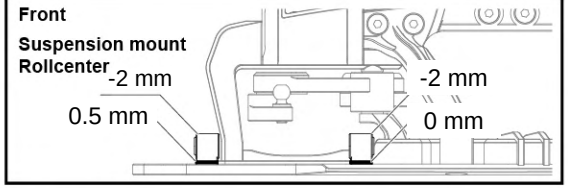


Steering

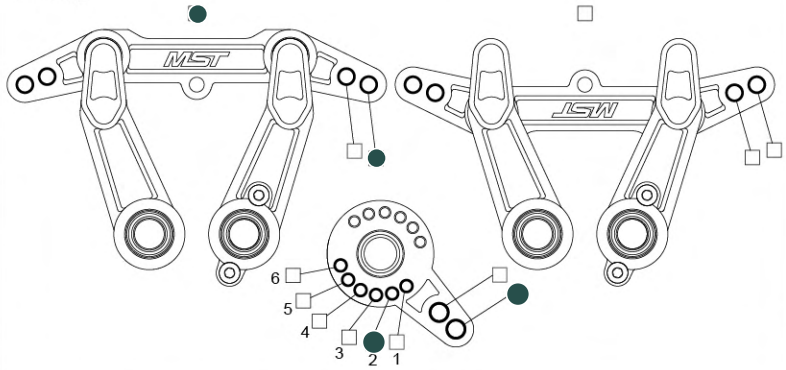


Rear

Suspension mount Rollcenter

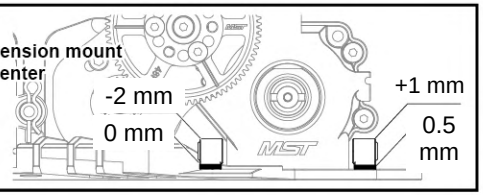


Front lower arm



- [ ] 3
- [ ] 2
- [x] 1


Rear lower arm



- [x] 1
- [ ] 2
- [ ] 3
- [ ] 4

Front damper


Oil brand: Unicorn Oil

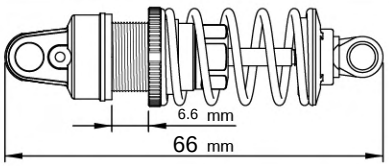

Shock oil: 30 cst Spring Yokomo Front Direct Type (D-177FAA)

Spring: ____ mm ____ Piston: 4 X 1.1 mm

Rear damper

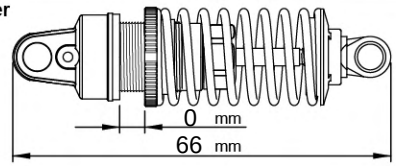

Shock oil: 30 cst Spring Yokomo Rear Side Grip Type (D179RA)

Spring: ____ mm ____ Piston: 4 X 1.1 mm

Spur Gear ÷ Pinion Gear × Reduction Gear = Gear ratio

80 T ÷ 23 T × 3.00 = 10.435

Motor Hobbywing 10.5 T ESC: Hobbywing **Battery:** Turnigy 3000 mAh

Transceiver: _____ **Gyro:** Yokomo DP302 V4 **Sensitivity:** 75 Hard %

※ Please download the blank setup sheet at [www.rc-mst.com].