1/18 LATE MODEL—SETUP SHEET

1RC RACING, LLC
WWW.1RC-RACING.COM

Setup: 2026-11-14 On Track RC Hobbies

Driver : George Mari **Date:** November 16, 2026

Track Name: On Track RC Hobbies **City/State:**

Surface: Indoor carpet Grip: High

Race: Main A **Start:** **Finish:** 1

Open in So Dialed App
More: sodialed.com/setups

Left Front

Tire Compound: Std Soft

Shock O-Ring: Clear

Shock Type: Plastic Alum

Oil/Grease: AE Greenn Slime

Spring: Soft Med Hard

Spring Preload: 0

Caster: +2 degrees

Corner Weight:

Chassis Height: 8

Front

Toe:

Shock caps: Drilled

Total Car Weight:

Right Front

Tire Compound: Std Soft

Shock O-Ring: Clear

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Soft Med Hard

Spring Preload: 0

Caster: +2

Corner Weight:

Chassis Height: 7

Electronics

Servo: 1RC

ESC: 1RC

Tx:

Rx: Fly... Flysky GT5

Battery: 4 Cell 2 5 Cell LiPo

Motor: 8700kv 10,000kv

Notes: Steering exponential
15 pct; Steering trim was L50.

Misc


Servo Arm Hole: Upr Lwr

Dual Rate Amount: 65 %

Motor Heatsink: Yes No

Other:

Servo arm: Servo saver

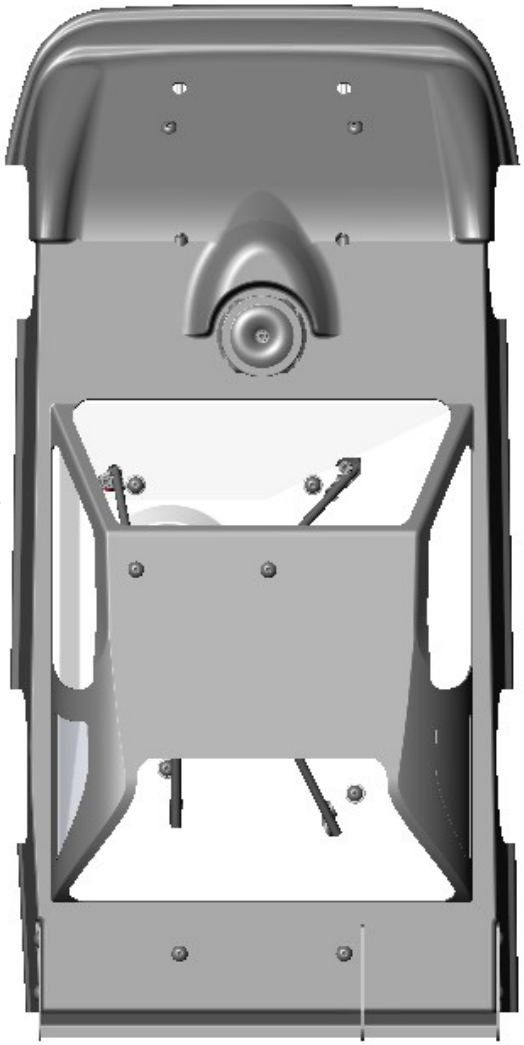

Left Rear

Tire Compound: Std Soft

Shock O-Ring: Clear

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Medium

Spring Preload: 1

Caster:

Corner Weight:

Chassis Height:

Wheel hex: 2 mm

Rear

Adjustable left rear radius rod 5 turns shorter than normal for rear steer.

Right Rear

Tire Compound: Std Soft

Shock O-Ring: Clear

Shock Type: Plastic Alum

Oil/Grease: AE Green Slime

Spring: Short Medium

Spring Preload: 1

Caster:

Corner Weight:

Chassis Height:

Wheel hex: 0 mm

Performance notes: Great setup. Rear of the car slides just enough to be nimble. Getting on the throttle is great. - no push, no oversteer, just follows where your pointing it.