SETUP SHEET

SRX2 gen3

SERPENT

More: sodialed.com/setups

DRIVER, TRACK AND RESULTS

DRIVER	Ken Grace	Team Associated	WEATHER	AIR TEMP	TRACK TEMP	Moisture: Dry
RACE	Practice	November 8, 2021	Class: 17.5 2wd buggy	FINAL POS.	Best: 9.2
TRACK	First State Hobbies	TYPE	Indoor carpet	STYLE	☐ TIGHT ☐ MEDIUM ☐ OPEN ☐	Tight
SURFACE GRIP	☐ LOW ☐ MEDIUM ☐ HIGH ☐	High	CONDITION	☐ SMOOTH ☐ ROUGH ☐	Smooth
Setup: First State Hobbies 11/07/21			Open in So Dialed App		

SHOCK ABSORBERS

FRONT		REAR
450 cst	OIL	350 cst
3.15 lb Pink	SPRINGS	Astro 2.1 lb Blue
0	REBOUND	0
Int: 1.25 Ext: 0	LIMITERS	Int: 1.25 Ext: 0
2 x 1.6mm	PISTONS	2 x 1.7mm
Oil brand: PT RC		
◉ SHORT ☐ LONG	SPRING BUCKETS	☐ SHORT ◉ LONG
☐ BLADDER ◉ EMULSION	SEAL TYPE	☐ BLADDER ◉ EMULSION

ANTI-ROLL BARS

☐ FRONT	☐ REAR
Front: None	Rear: None

REAR DIFFERENTIAL

☐ BALL DIFFERENTIAL

◉ GEAR DIFF 7,000 cst

DIFF HEIGHT 4

GEARING

PINION 26 Teeth

SPUR GEAR 78 Teeth

ELECTRONICS

BATTERY

BRAND Voodoo LCG CAPACITY 3900 mAh

MOTOR Wind: 17.5 T

BRAND Trinity TYPE X-Factor Certified TIMING

ESC

BRAND Tekin TYPE RS Gen2

AERODYNAMIC CONFIGURATION

BODY Gen3

REAR WING 7.0" v2

REAR WING WIDTH REAR WING LIP mm

RR WING ANGLE ◉ 0° ☐ 2° ☐ 4° ☐ 6° ☐ 8° MOUNT ☐ STD ☐ LOW

FRONT WING LFR SRX2

TIRES

FRONT		REAR
Controlled Tire ☐		
Pro-Line Wedge Gen3	MAKE	Schumacher Cactus
	TYPE	
Z4	COMPOUND	Yellow
None	INSERTS	Open-cell
JConcepts Mono	WHEELS	JConcepts Mono
SXT 3.0	ADDITIVE	SXT 3.0

FRONT

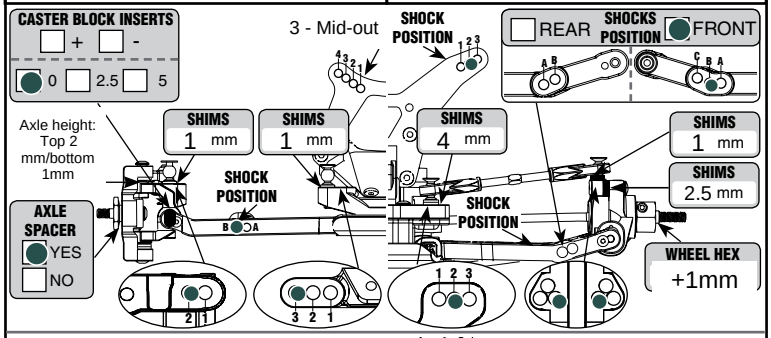

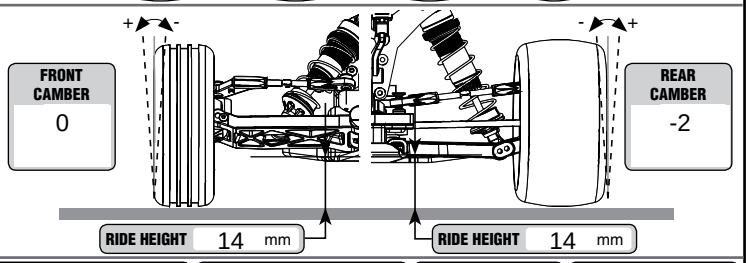

FRONT BULKHEAD

◉ STOCK
☐ ALU
☐ BRASS

FRONT CASTER BLOCK

◉ STOCK
☐ ALU
STEERING SREW
☐ YES ☐ NO

REAR WHEEL BASE

Front

No arm spacers on SRX-2

REAR ARM

SRX2 MM v2 Hard

FRONT ARM

☐ STRAIGHT ARM

◉ GULL ARM

TRANSMISSION

Gears: 3

Layout: Gen3

REAR HUB

◉ SHORT OFFSET HUB

☐ LONG OFFSET HUB

REAR UPRIGHT INSERT

AXLE HEIGHT
☐ 0 ☐ 0.5 ☐ 1 ☐ 1.5
◉ 2 ☐ 2.5 ☐ 3

INSERT OFFSET
-1 ☐
0 ◉

BUMP STEER

SPACER
☐ YES
☐ NO

SHIMS 1 mm

ACKERMANN

☐ OPT.0 ◉ OPT.1
☐ OPT.2 ☐ OPT.3

SHIMS 1 mm

REAR FRONT TOE BLOCK

Aluminum narrow

REAR REAR TOE BLOCK

Aluminum narrow

REAR AXLE

◉ LONG SHAFT

SHIMS

☐ SHORT SHAFT

DRIVETRAIN DRIVESHAFT

Pin: Middle

LENGTH

66mm SRX2

SLIPPER

◉ STOCK PLATES

☐ VENTED PLATES

Drive type: Slipper

DISTANCE

1.5-2mm from end of shaft

FRONT TOE 0 °

WEIGHT DISTRIBUTION

CAR WEIGHT grams

WEIGHT BIAS FR % RR %

Batt location: Front

REAR TOE 0

REMARKS