XPRESS EXECUTE XQ3S

Setup: Flagler RC
Open in So Dialed App

SET-UP SHEET

More: sodialed.com/setups

Driver	Donovan Pinkerton	**Track Surface**	Outdoor asphalt	Roughness: Medium/Bumpy	**Track Temperature**	32C/90F
Date	September 8, 2024	**Track Traction**	Low/Medium	**Result**	**Air Temperature**	43C/110F
Track	Flagler RC	**Country**		**Best Lap**	13.888 s	**Humidity**		**Remark**	

Front

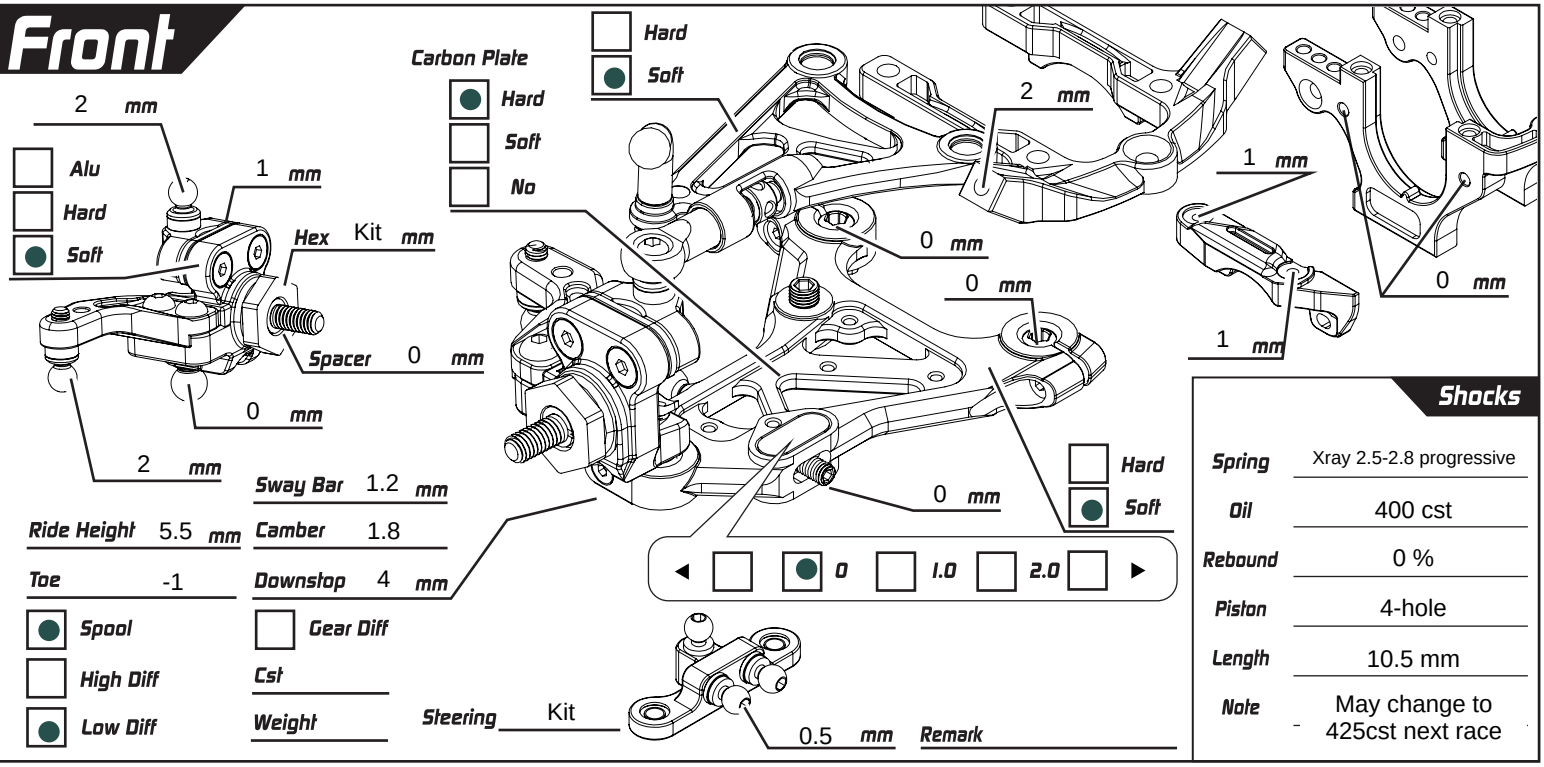

Ride Height	5.5 mm	**Sway Bar**	1.2 mm
Toe	-1	**Camber**	1.8
Spool		**Downstop**	4 mm
High Diff		**Gear Diff**	
Low Diff		**Cst**	
		Weight	
Steering	Kit		

Remark

Shocks

Spring	Xray 2.5-2.8 progressive
Oil	400 cst
Rebound	0 %
Piston	4-hole
Length	10.5 mm
Note	May change to 425cst next race

Rear

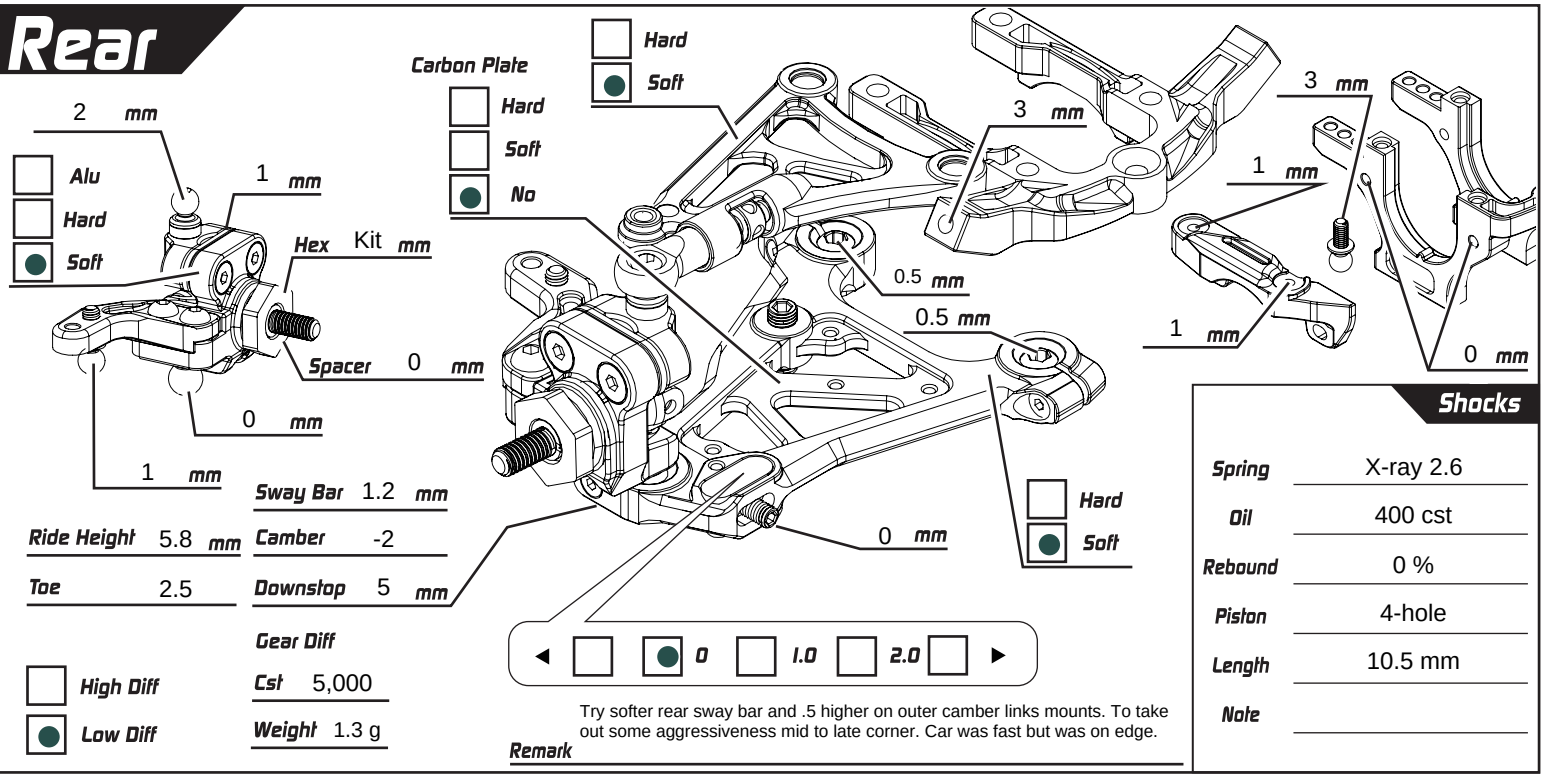

Ride Height	5.8 mm	**Sway Bar**	1.2 mm
Toe	2.5	**Camber**	-2
		Downstop	5 mm
		Gear Diff	
High Diff		**Cst**	5,000
Low Diff		**Weight**	1.3 g

Remark Try softer rear sway bar and .5 higher on outer camber links mounts. To take out some aggressiveness mid to late corner. Car was fast but was on edge.

Shocks

Spring	X-ray 2.6
Oil	400 cst
Rebound	0 %
Piston	4-hole
Length	10.5 mm
Note	

Weight g

Battery Cayote **Body** MonTech Zero

Tires F: Sweep R: Sweep **Additive** Cleaned with brake…

Weight g

Weight g

ESC Hobbywing **Motor** R1 V21 **Servo Horn Height** 20mm mm

Spur 64 P/ 96 T **Servo** Sanwa/Airtronics

Pinon P/ 49 T **FDR** 3.72

Weight g

Carbon
Alu

Weight g

Upper deck: Split 2.0mm Graphite

Screws: 1 in front closest to spur. 1 in rear closest to spur with bb stiffening

One Piece

Fix
Bearing
Free

Split